




# ESS EP11

HIGH VOLTAGE STORAGE BATTERY  
**From Exelon**



The EP11 is a high-performance, scalable battery storage system, allows for maximum flexibility, making it suitable for a broad range of storage applications. Additional batteries can be installed in parallel allowing for a maximum storage capacity of 41.6kwh.

- Scalable to 41.6 kWh
- 90% Depth of Discharge
- Floor or Wall Mounting
- Compact & Easy Installation
- IP65 Protection Level
- High Voltage and High Efficiency

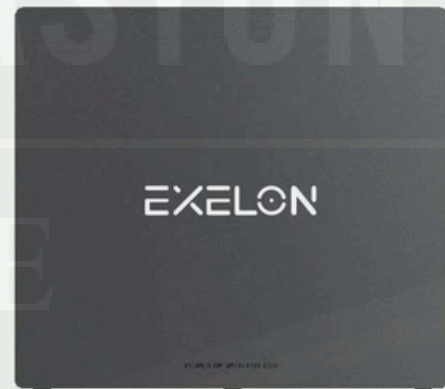

Safety  
Reliable



Easy  
Installation



High  
Efficiency



Expandable  
System



90%  
DoD

# EXELON EP11

## HIGH VOLTAGE STORAGE BATTERY

SYSTEM NAME	EP11
<strong>ELECTRICAL CHARACTERISTICS</strong>	
Compatible PCS	All Series of H1, KH, H3, H3-Pro, US
Battery Type	LifePO4 Prismatic Cell
Nominal Energy [kWh]	10.36
Nominal Voltage [V]	384
Operating Voltage [V]	348 ~ 438
Max.Charge/Discharge Current [A]*1	27
Recommend Charge Current [A]	13.5
Peak Discharge Current [A]	65 @60s
Peak Charge Current [A]	32.4 @5s
Battery Pack Round-Trip Efficiency [%]	≥95
Depth of Discharge [%]	90
Cycle Life	≥4000
Communication	CAN
Display	LED*5
Scalability	Max. 4 Units in Parallel
<strong>OPERATING CONDITIONS</strong>	
Installation Location	Outdoor/ Indoor
Operating Temperature [°C]	Charge: 0 ~ 55 Discharge: -10 ~ 55
Storage Temperature [°C]	0~35
Cooling Method	Natural Convection
Humidity [%]	5 ~ 95 (No Condensing)
Altitude [m]	Max. 2,000
<strong>MECHANICAL CHARACTERISTICS</strong>	
Dimensions (W*H*D) [mm]	710*625*147
Weight [kg]	99±2
<strong>CERTIFICATES</strong>	
Safety	IEC62619
EMC	EN IEC 61000-6-1/3
Transportation	UN38.3
Ingress Protection	IP65

\*1, The current is affected by temperature, cell voltage and SOC.